

FITTING INSTRUCTIONS

BW723, BW939, BW994, BW995, BW996

BRAKE PAD SETS FITTED WITH BACKPLATE SPRINGS THAT ARE OFFSET RELATIVE TO THE CENTRE LINE OF THE PAD.

Example:- BW996

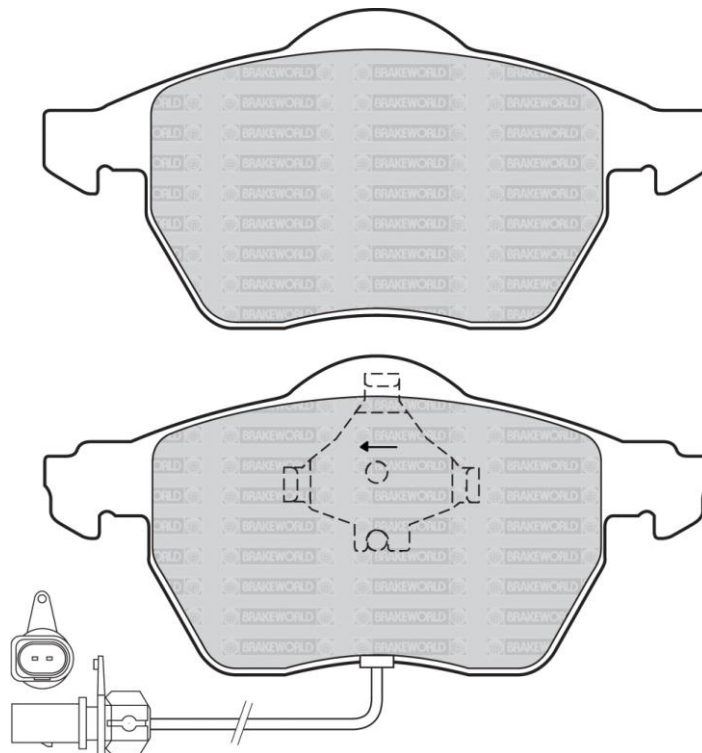


Image not to scale

The inner (piston side) pads are often fitted with backplate springs that are offset, by about 2mm, relative to the centre line of the pad. Where pads are supplied with offset springs, the inner pads are not interchangeable and must be fitted to the correct caliper.

An arrow is generally marked on the backplate or spring to act as a guide. This must always be aligned with the direction of wheel rotation (when the vehicle is moving forwards).

Failure to observe this will result in serious brake noise.

Please note that some manufacturers elect to supply these references with symmetrical back plate springs that are interchangeable. These are considered an acceptable alternative.

NPH 23/07/13